


ADH-100

A fully portable dehumidifier providing rapid drying and humidity control



This unit is utilized by restoration companies for building drying, process drying, and general dehumidification.

Airrex Large Capacity Dehumidifier Features

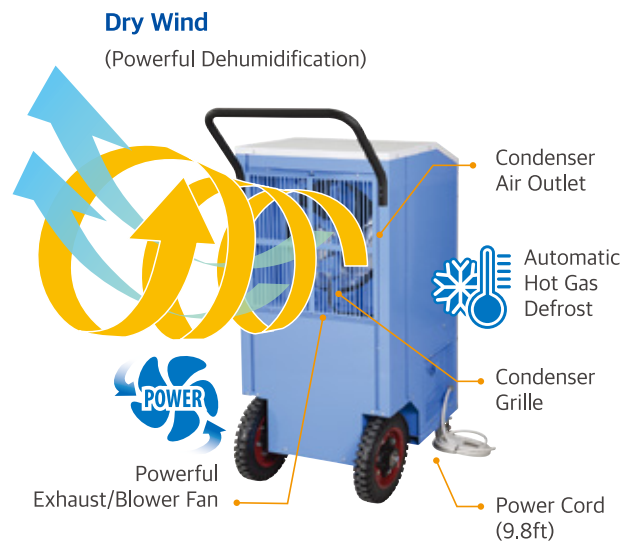

Digital Controls

- Off Timer: 24hr
- Adjustable 4-Steps Fan speed
- Error Messaging
- Current and Set Humidity Display



Built-in Drain Pump

- Powerful Automatic drain pump



Air Filter

- Replace air filter



Manual Condensed water Drain Button

- Before moving the dehumidifier, push this button not to overflow the remaining condensed water




ADH-100 Specifications



Items	ADH-100
Product	Large Capacity Dehumidifier
Area to drying	3,550 ft ²
Recommended Usable Area	3,550 ~ 5,680 ft ²
Power Supply	115Vac 60Hz 1Ph
Rated Power Consumption	1.2 kW
Operating Current	10A (80°F 60% RH)
Operating Range	41~95°F D.B, 3~90% RH
Size (WDXH)	19.9 X 22.7 X 39.2 inch
Weight	132 lbs
Auto Condensate Pump	Built-in
Water Removal (Max)	210 pints/100 liters/per day (90°F 80% RH)
Water Removal (General)	170 pints/80 liters/per day (80°F 60% RH)
Fan Steps	4 Steps (High,Mid,Low,Quiet)
Noise	53 dB
Air Filter	Vinyl Chloride Filter
Off Timer	24hr (Every 30min.)
Safety Devices	High Pressure Switch / Low Pressure Switch / 3 Minute Delay Timer on Compressor Thermostat Protection for the Compressor Water Full Sensor / Defrost Function

※ Designs and specifications of products are subject to change without prior notice for the improvements. The colors of products may be different due to the printing process.

Ideal applications for Airrex Dehumidifier.

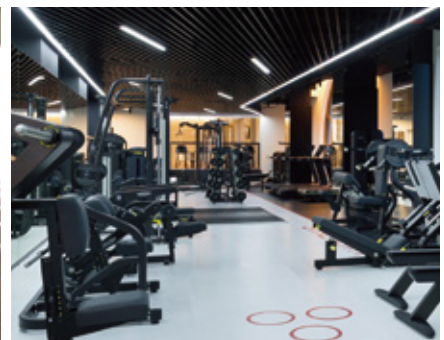

Flood restoration, Building, Process drying and General dehumidification, etc.

Airrex USA Office Mailing Address:
 1191 Jewell Dr Ste 101,Waco, TX 76712

TEL: 888-535-8841
FAX: 469-574-7924

E-mail: sales@airrexusa.com
Website: www.airrexusa.com