


ADH-8000

A fully portable dehumidifier providing fast drying



This unit is utilized by restoration rental companies and industrials for building drying, process drying, and general dehumidification.

AIRREX Large Capacity Dehumidifier Features

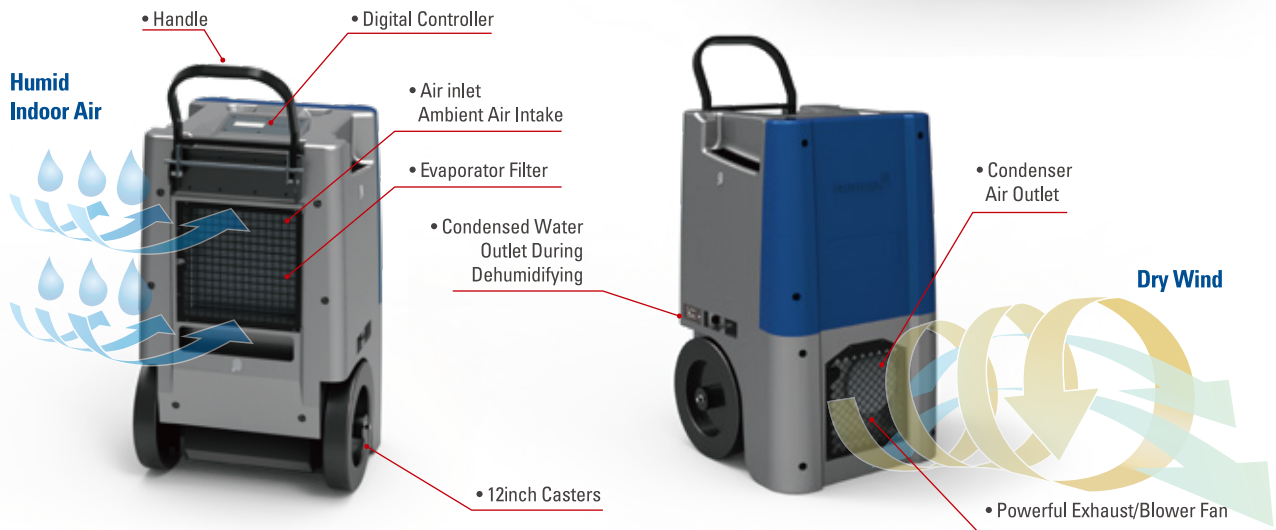

Digital Controls

- Off Timer: 24hr
- Adjustable 2-Steps Fan speed
- Error Messaging
- Current and Set Humidity Display

Built-in Replaceable Drain Pump


- Powerful Automatic Drain Pump

Excellent Defrost

- Hot gas bypass

Forced Drainage

- Before moving the dehumidifier, push this button not to overflow the remaining condensed water






US Electrical Standards
(ETL)

ADH-8000 Specifications

ITEMS	Dehumidifier			
POWER SUPPLY	115Vac 60Hz 1Ph			
DEHUMIDIFICATION	MAX.	25.4gal/day		
	NOMINAL	15.9gal/day		
POWER CONSUMPTION	1.17 kW			
CURRENT CONSUMPTION	10.25 A			
REFRIGERANT	R-410A / 1.43 lbs			
NOISE LEVEL	60 dB			
MOTOR COMPRESSOR	RLA	8.5A	LRA	38A
MOTOR	FLA	2.1A	HP	0.32A
HIGH PRESSURE	441 psi			
LOW PRESSURE	128 psi			
DIMENSIONS(WxDxH)	20 x 20 x 33.5 inch			
WEIGHT	118 lbs			
OPERATING TEMP	33°F ~ 100°F (1~38°C)			
AIR FLOW	High 554 CFM / Low 392 CFM			

• Stackable example

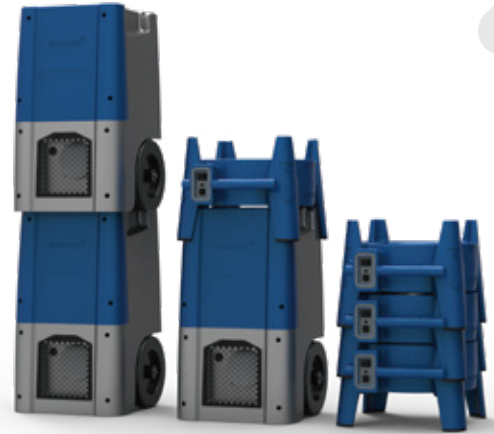


• Moving



※ Designs and specifications of products are subject to change without prior notice for the improvements. The colors of products may be different due to the printing process.

Ideal applications for Airrex Dehumidifier.

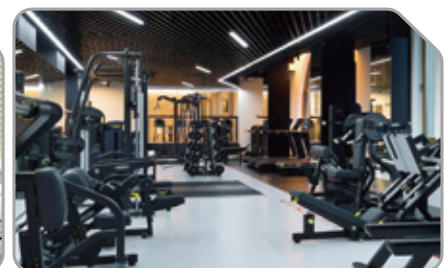

Flood restoration, Building, Process drying and General dehumidification, etc.

AIRREX USA Office Mailing Address:
1191 Jewell Dr Ste 101, Waco, TX 76712

TEL: 888-535-8841
FAX: 469-574-7924

E-mail: sales@airrexusa.com
Website: www.airrexusa.com