



ADH-8000R

A fully portable dehumidifier providing fast drying


This unit is utilized by restoration rental companies and industrials for building drying, process drying, and general dehumidification.

AIRREX Large Capacity Dehumidifier Features




Digital Controls

- Off Timer: 24hr
- Adjustable 2-Step Fan Speed
- Error Messaging
- Current and Set Humidity Display




Built-in Replaceable Drain Pump

- Powerful Automatic Drain Pump



Excellent Defrost

- Hot Gas Bypass



Forced Drainage


- Before moving the dehumidifier, push this button not to overflow the remaining condensed water



ADH-8000R Specifications

ITEMS	Dehumidifier			
Power Supply	115V~ 60Hz, 1Ph			
Dehumidification	MAX.	25.4 gal/day		
	NOMINAL	15.9 gal/day		
Power Consumption	1.17 kW/h			
Current Consumption	10.25 A			
Refrigerant	R-454B / 1.21 lbs			
Decibel Level	60 dB			
Motor Compressor	RLA	8.5 A	LRA	38 A
Motor	FLA	2.1 A	HP	0.32 A
High Pressure	441 psi			
Low Pressure	128 psi			
Dimensons (WxDxH)	20 x 20 x 33.5 inch			
Weight	118 lbs			
Operating Temp	34°F ~ 86°F (~90%) / 87.8°F ~ 100.4°F (~60%)			
Air Flow	High 554 CFM / Low 392 CFM (1 year warranty and 3 years on compressor)			

• Stackable example

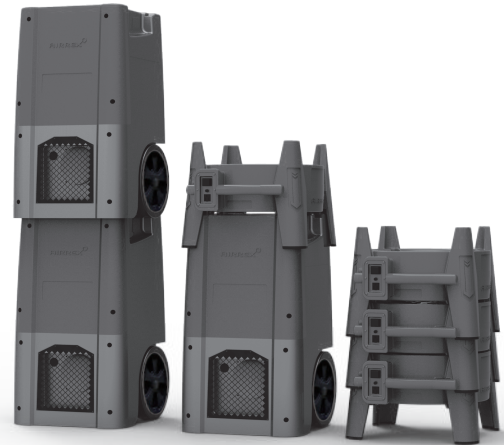


• Moving



※ Designs and specifications of products are subject to change without prior notice for the improvements. The colors of products may be different due to the printing process.


Ideal applications for Airrex Dehumidifier.

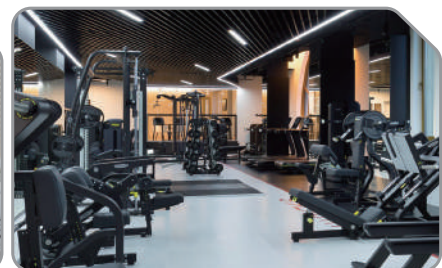

Flood restoration, building, process drying and general dehumidification, etc.

TEMP-AIR Sales Office Mailing Address:

 2031 Exchange Parkway Ste A, Waco, TX 76712

 877-728-2133

 www.tempairsales.com

 sales@tempairsales.com